

06-28-00

H

06/27/00  
JC821 U.S. PTO

DP-301794, Page 1

DELPHI TECHNOLOGIES, INC.  
Legal Staff  
P.O. Box 5052  
Mail Code: 480-414-420  
Troy, Michigan 48007-5052

JC855 U.S. PTO  
09/604129  
06/27/00

26-JUN-00

Assistant Commissioner for Patents  
Box Patent Application  
Washington DC 20231

Enclosed for filing are the following patent application papers:

Docket No.: DP-301794  
  
Inventors : GALEN BRUCE FISHER  
JOHN E. KIRWAN  
  
Title : FAST LIGHT-OFF CATALYTIC REFORMER

I hereby certify that this document is being deposited with the  
United States Postal Service as Express Mail Post Office to  
Addressee addressed to Assistant Commissioner for Patents,  
Washington, D.C. 20231 on:

Date of Deposit: June 27, 2000  
Express Mail Label No: EK34320137945  
Signature: Amy C. Downey  
Name: Amy C. Downey

Filing Fee Formula

Basic Fee.....	\$ 690.00
Additional Fees:	
Number of independent claims in excess of 3, times \$78.00 .....	\$ 0.00
Number of claims in excess of 20, times \$18.00 .....	\$ 0.00
Multiple dependent claim, add \$260.00 .....	\$ 0.00
Total Filing Fee.....	\$ 690.00

The patent specification DP-301794 entitled FAST LIGHT-OFF CATALYTIC REFORMER and filed in the Patent and Trademark Office herewith is the patent specification for which the inventor(s) executed the Declaration enclosed herewith.

Please charge the \$ 690.00 filing fee to DELPHI TECHNOLOGIES INC. Deposit Account No. 50-0831.

  
VINCENT A. CICHOSZ  
Reg. No. 35844  
(248) 267-5555

Enclosures

DP-301794

## FAST LIGHT-OFF CATALYTIC REFORMER

## TECHNICAL FIELD

The present invention relates to a catalytic reformer and method for converting a hydrocarbon stream to a reformat fuel stream comprising hydrogen, and more particularly relates to a fast light-off catalytic reformer and method for rapid production of reformat fuel. The present invention is particularly suitable for on-board production of reformat for hydrogen cold-start in an internal combustion engine. The present invention is also suitable for providing reformat to a fuel cell such as a solid oxide fuel cell.

## 10 BACKGROUND OF THE INVENTION

A catalytic hydrocarbon fuel reformer converts a fuel stream comprising, for example, natural gas, light distillates, methanol, propane, naphtha, kerosene, gasoline, diesel fuel, or combinations thereof, and air, into a hydrogen-rich reformat fuel stream comprising a gaseous blend of hydrogen, carbon monoxide and nitrogen (ignoring trace components). In the reforming process, the raw hydrocarbon fuel stream is typically percolated through a catalyst bed or beds contained within reactor tubes mounted in the reformer vessel. The catalytic conversion process is typically carried out at elevated catalyst temperatures in the range of about 1200 °F to about 1600 °F.

In most reformers of this type, hot burner gas generated at a burner generally disposed within the reformer vessel accumulates in a primary (typically, upper) plenum within the vessel, contacting and heating the outer surface of the reactor tubes, thereby heating the catalyst. The hot burner gas may be directed through a cylindrical sleeve surrounding the lower portion of each reactor tube, so that the hot burner gas travels in close contact with outer surfaces of the reactor tubes and effective heat transfer occurs. Hot burner gas from the primary plenum flows through a narrow annular passage between

the internal wall of the sleeve and the external wall of each reactor tube, and into a secondary (lower) plenum, from which it is discharged. Seal plates or insulation may be employed to prevent bypass of the hot burner gases around the sleeve.

5                   The produced hydrogen-rich reformat stream may be used, for example, as the fuel gas stream feeding the anode of an electrochemical fuel cell after passing the reformat stream through a water gas shift reactor and other purification means such as a carbon monoxide selective oxidizer. Reformat is particularly well suited to start up a solid oxide fuel cell (SOFC) 10 system because the purification step for removal of carbon monoxide is not required for an SOFC.

                  The hydrogen-rich reformat stream may also be used as a hydrogen fuel to fuel an engine. Hydrogen-fueled vehicles are of interest as low-emissions vehicles because hydrogen as a fuel or a fuel additive can 15 significantly reduce air pollution and can be produced from a variety of fuels. Hydrogen provides the capability to run an engine with very lean fuel-air mixtures that greatly reduce production of NOx. Small amounts of supplemental hydrogen fuel may allow conventional gasoline internal combustion engines to reach nearly zero emissions levels. Commonly 20 assigned, co-pending U.S. Patent application Serial No. \_\_\_\_\_ (Attorney Docket No. DP-301698) of Kirwan et al., entitled "System And Controls For Near Zero Cold Start Tailpipe Emissions In Internal Combustion Engines," hereby incorporated by reference herein in its entirety, discloses an on-board fuel reformer-engine system employing substantially 100% 25 reformat fueling at start-up for near-zero cold start hydrocarbon and NOx engine emissions. The system and method provides for controlling the supply of one or a combination of reformat, liquid fuel, and air to the engine and exhaust catalyst to achieve low hydrocarbon and NOx emissions over a full range of engine operating conditions.

30                   While hydrogen fuel may be stored on-board to provide an instant source of reformat fuel, on-board storage of reformat significantly

increases system size, cost and complexity. For example, on-board storage may require high-pressure vessels, cryogenic containers if the hydrogen is to be stored as a compressed gas or liquid, or large volumes and weights if the hydrogen is to be stored as a hydride. In addition, storage of carbon  
5 monoxide may be a safety concern. Further, the refill time for hydrogen is substantially longer than that for gasoline when hydrogen is to be stored on-board.

What is needed in the art is a reformat-generating device comprising a rapid start up (or "fast light-off") system. What is further  
10 needed in the art is a rapid start-up catalytic reformer for producing reformat suitable for feeding a power generation system such as a fuel cell or engine.

#### SUMMARY OF THE INVENTION

A fast light-off catalytic reformer and method is provided. The  
15 reformer includes at least one reactor tube having an inlet for receiving a flow of fuel and a flow of air, a reforming catalyst disposed within the reactor tube for converting the fuel and air to a reformat stream, and an outlet for discharging the produced reformat stream. An ignition device is disposed within the reactor tube for initiating an exothermic reaction between the fuel  
20 and air and using the heat generated thereby to provide fast light-off of the reforming catalyst. The ignition device may be located at various positions within the reactor tube, as desired, such as, but not limited to, upstream of the reforming catalyst. An associated control system selects fuel and air flow delivery rates and operates the ignition device so as to achieve fast light-off of  
25 the reforming catalyst at start-up and to maintain the catalyst at a temperature sufficient to optimize reformat yield.

The method includes supplying a flow of premixed fuel and air to the catalytic reformer and igniting the fuel and air within the reactor tube to rapidly heat the reforming catalyst with the heat of combustion. The method  
30 also includes controlling the fuel and air delivery rate and the igniting so as to

achieve fast light-off at start-up and to maintain the reforming catalyst at a temperature sufficient to optimize reformat yield.

The present fast light-off reformer and method advantageously provides a compact and efficient system. The present invention provides the  
5 further advantage of reducing the size of a discrete burner and associated system for flowing and exhausting hot burner gases in order to achieve and maintain an effective catalyst temperature.

The present fast light-off reformer and method provides the advantage of rapid production of high yields of reformat and is particularly  
10 useful for an on-board reforming strategy for meeting SULEV emissions with spark-ignition engines, especially with larger, higher emitting vehicles. The present fast light-off reformer and method is also well suited for providing rapid production of reformat to other power generation systems, such as fuel cells, and is particularly useful for start up and fueling solid oxide fuel cells.

15 These and other features and advantages of the invention will be more fully understood from the following description of certain specific embodiments of the invention taken together with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

20 Referring now to the drawing, which is meant to be exemplary, not limiting:

FIG. 1 is a perspective view, partially in section, of an embodiment of a fast light-off catalytic reformer in accordance with the present invention.

25

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

Turning to FIG. 1, a fast light-off catalytic reformer in accordance with one possible embodiment of the present invention includes a reactor tube 10 having an inlet 12 in a first end for receiving a flow of fuel  
30 and a flow of air, shown as combined fuel-air stream 14. Reactor tube 10 may be any shape, but typically comprises a substantially cylindrical reactor

tube. While the present description discusses a single reactor tube 10, reforming catalyst 16, and ignition device 22, the present fast light-off reformer may comprise one or more reactor tubes, as desired.

Reforming catalyst 16 is disposed within the reactor tube 10.

5 Reforming catalyst 16 may comprise any reforming catalyst suitable for converting the fuel feedstock and air to reformat, including, but not limited to, for example, rhodium, platinum, their alloys, and combinations thereof. Preferably, a protective coating or firewall (not shown) is disposed about catalyst 16. During operation, air and fuel 14 flows through inlet 12 and is  
10 converted in catalyst 16 to a hydrogen rich reformat fuel stream 18 that is discharged through outlet 20.

Ignition device 22 is disposed within the reactor tube 10 to initiate an exothermic reaction in fuel and air flow 14. Heat generated by this reaction is used to provide fast light-off (i.e., extremely rapid heating) of the  
15 reforming catalyst 16. The ignition device may be located upstream of the catalyst, ~~within the catalyst~~ at the front face thereof, ~~or~~ within the catalyst at the rear face of the catalyst. In a preferred embodiment, the ignition device 22 is disposed within the reactor tube 10 upstream of the reforming catalyst 16, i.e., between inlet 12 and reforming catalyst 16. Ignition device 22 may  
20 be any device suitable for initiating exothermic reactions between fuel and air 14, including, but not limited to, a catalytic or non-catalytic substrate, such as a wire or gauze, for receiving electric current from a voltage source, a spark plug, a glow plug, or a combination thereof.

An associated control system (30) selects and maintains the  
25 appropriate fuel and air delivery rates and operates the ignition device 22 so as to achieve fast light-off of the reforming catalyst 16 at start-up and to maintain catalyst 16 at a temperature sufficient to optimize reformat 18 yield. The control means used herein may comprise any of various control means known in the art for providing air and fuel control and metering functions.

30 Excellent reformat yields from the reactor depend upon both a sufficiently high catalyst temperature and the appropriate air-fuel ratio. The

or  
H.B.F.  
J.L.V.

optimum air-fuel mixture for producing reformat is very fuel rich, but leaner mixtures provide higher temperatures for rapidly heating the catalyst. The control system varies air-fuel ratio during start-up of the reformer to rapidly obtain both the temperatures and air-fuel mixtures required for high reformat yields.

The present fast light-off catalytic reformer and method produce rapid, high yields of reformat fuel. The produced reformat may be bottled in a vessel (40) or used to fuel any number of systems operating partially or wholly on reformat fuel. Such power generation systems (50) may include, but are not limited to, engines such as spark ignition engines, hybrid vehicles, diesel engines, fuel cells, particularly solid oxide fuel cells, or combinations thereof. The present fast light-off reformer and method may be variously integrated with such systems, as desired. For example, the present fast light-off reformer may be employed as an on-board reformer for a vehicle engine operating wholly or partially on reformat, the engine having a fuel inlet in fluid communication with the reformer outlet 20 for receiving reformat 18 therefrom. The present fast light-off reformer and method is particularly suitable for use as an on-board reformer for generating a fast supply of reformat 18 for initial start-up of a system. The present reformer and method is particularly advantageous for hydrogen cold-start of an internal combustion engine, providing a fast supply of hydrogen-rich reformat which allows the engine exhaust to meet SULEV emissions levels immediately from cold-start.

While the invention has been described by reference to certain preferred embodiments, it should be understood that numerous changes could be made within the spirit and scope of the inventive concepts described. Accordingly, it is intended that the invention not be limited to the disclosed embodiments, but that it have the full scope permitted by the language of the following claims.

## CLAIMS

1. A fast light-off catalytic reformer comprising:  
 a catalytic reformer characterized by at least one reactor tube,  
 said reactor tube having an inlet in a first end for receiving a flow of fuel and  
 a flow of air, a reforming catalyst disposed within said reactor tube for  
 5 converting said fuel and said air to a reformat stream, and an outlet in a  
 second end for discharging said reformat stream;

an ignition device disposed within said reactor tube for  
 initiating an exothermic reaction between said fuel and said air and using heat  
 generated thereby to provide fast light-off of said reforming catalyst; and;

- 10 a control system for selecting fuel and air flow rate and  
 operating said ignition device so as to achieve fast light-off of said reforming  
 catalyst at start-up and to maintain said catalyst at a temperature sufficient to  
 optimize reformat yield.

2. The reformer of claim 1, wherein said ignition device  
 disposed within said reactor tube is located upstream of said reforming  
 catalyst, ~~within said reforming catalyst~~ at the front face of said reforming  
 catalyst, ~~or~~ <sup>or</sup> within said reforming catalyst at the rear face of said reforming  
 5 catalyst.

3. The reformer of claim 1, wherein said ignition device  
 comprises a catalytic substrate or a non-catalytic substrate for receiving  
 electric current from a voltage source, a spark plug, a glow plug, or a  
 combination thereof.



4. A power generation system employing a fast light-off reformer comprising:

a catalytic reformer characterized by at least one reactor tube, said reactor tube having an inlet in a first end for receiving a flow of fuel and a flow of air, a reforming catalyst disposed within said reactor tube for  
5 converting said fuel and said air to a reformat stream, and an outlet in a second end for discharging said reformat stream;

an ignition device disposed within said reactor tube for initiating an exothermic reaction between said fuel and said air and using heat  
10 energy generated thereby to provide fast light-off of said reforming catalyst;

a control system for selecting fuel and air flow rate and operating said ignition device so as to achieve fast light-off of said reforming catalyst at start-up and to maintain said catalyst at a temperature sufficient to optimize reformat yield; and

15 a power generation system operating at least partially on reformat fueling, said power generation system having a fuel inlet in fluid communication with said reformer outlet.

5. The fast light-off reformer-power generation system of claim 4, wherein said power generation system is an engine, a spark ignition engine, a hybrid vehicle, a diesel engine, a fuel cell, a solid oxide fuel cell, or a combination thereof.

6. A fast light-off reforming method comprising:  
supplying a flow of fuel and a flow of air to a catalytic reformer, said catalytic reformer characterized by at least one reactor tube having an inlet for receiving said flow of fuel and air, a reforming catalyst  
5 disposed within said reactor tube for converting said flow of fuel and air to a reformat stream, and an outlet for discharging said reformat stream;

igniting said fuel and air within said reactor tube to rapidly heat said reforming catalyst with heat energy generated thereby; and

controlling said fuel and air supply and said igniting so as to  
 10 achieve fast light-off of said reforming catalyst at start-up and to maintain said reforming catalyst at a temperature sufficient to optimize reformat yield.

7. The method of claim 6, wherein said igniting is with an ignition device selected from the group consisting of a catalytic or non-catalytic substrate for receiving an electric current, a spark plug, a glow plug, or a combination thereof.

5

8. The method of claim 7, wherein said substrate is wire or gauze of catalytic or non-catalytic materials.

*[Handwritten signature: J.B.L. GEL]*

9. The method of claim 6, further comprising:  
 fueling a power generation system at least partially with said reformat stream.

10. The method of claim 9, wherein said power generation system is an engine, a spark ignition engine, a hybrid vehicle, a diesel engine, a fuel cell, a solid oxide fuel cell, or a combination thereof.

DP-301794

## FAST LIGHT-OFF CATALYTIC REFORMER

## ABSTRACT OF THE DISCLOSURE

A fast light-off catalytic reformer and method includes at least one preferably substantially cylindrical reactor tube having an inlet for receiving a flow of fuel and a flow of air, a reforming catalyst disposed within the reactor tube for converting the fuel and air to a reformat stream, and an outlet for discharging the produced reformat stream. An ignition device disposed within the reactor tube initiates an exothermic reaction between the fuel and air. Heat generated thereby provides fast light-off of the reforming catalyst. An associated control system selects fuel and air flow delivery rates and operates the ignition device to achieve fast light-off of the reforming catalyst at start-up and to maintain the catalyst at a temperature sufficient to optimize reformat yield. The rapid production of high yields of reformat is particularly suitable for use in an on-board reforming strategy for meeting SULEV emissions with spark-ignition engines, especially with larger, higher emitting vehicles.

1/1

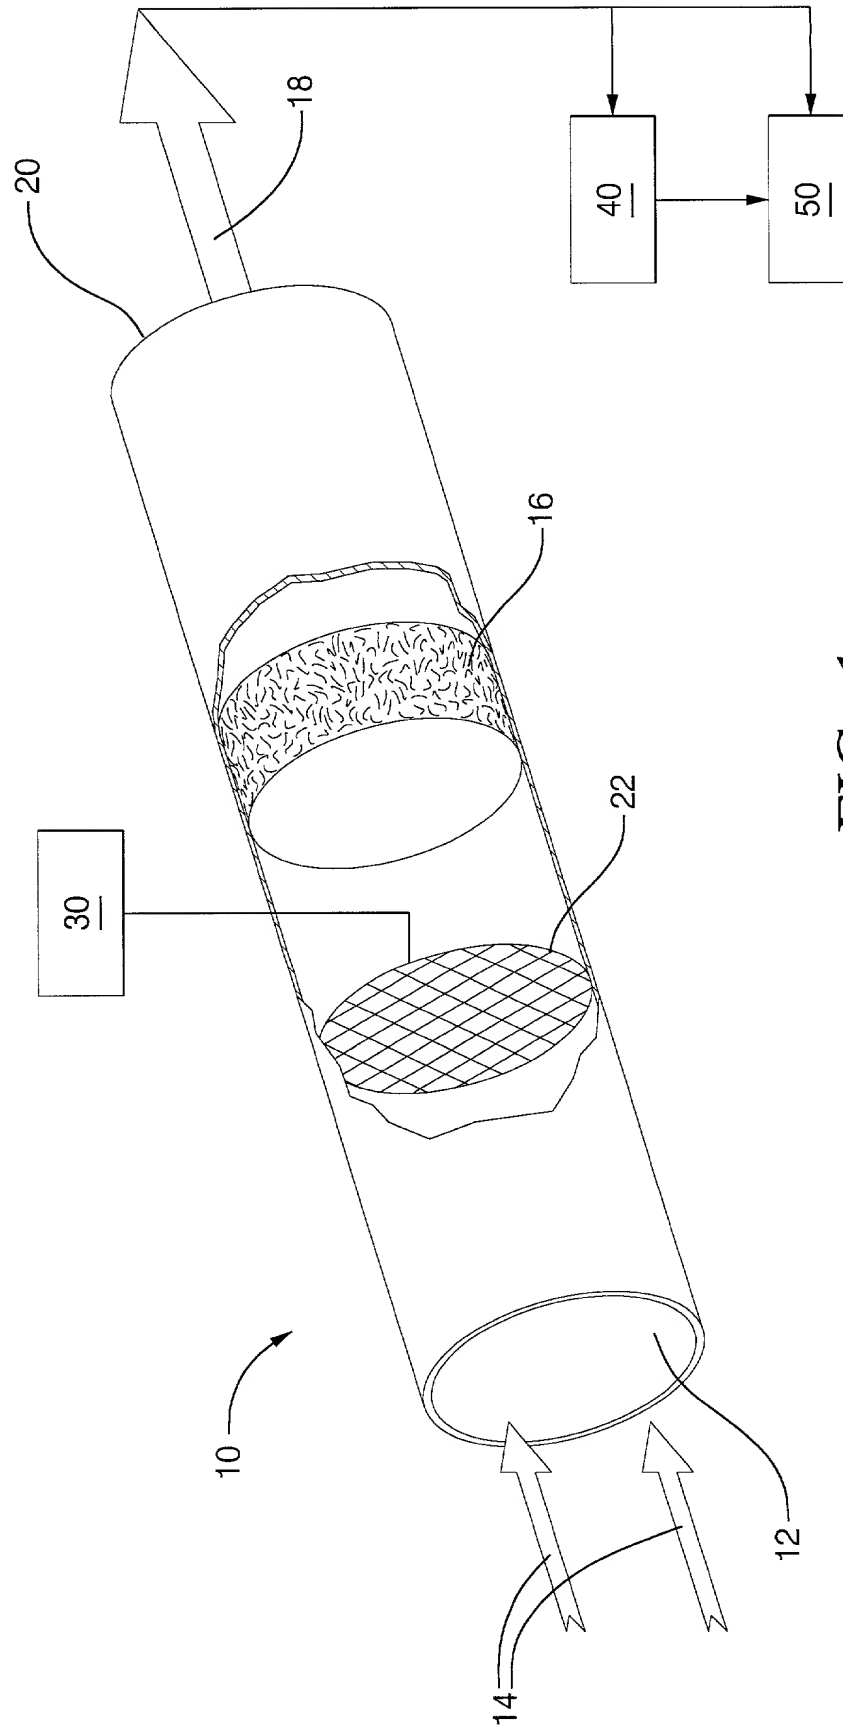


FIG. 1

**DECLARATION  
and  
DESIGNATION OF CORRESPONDENCE ADDRESS**

As an inventor named below, I hereby declare that:

My residence, post office address and citizenship are stated below next to my name.

I believe I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought in the specification DP-301794 entitled

**FAST LIGHT-OFF CATALYTIC REFORMER**

I have reviewed and understand the contents of the above-identified specification including the claims, as amended by any amendment referred to in this Declaration.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in title 37 Code of Federal Regulations, Section 1.56.

I further declare that all statements made above of my own knowledge are true, that all statements made above on information and belief are believed to be true, and that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under title 18 United States Code, Section 1001 and may jeopardize the validity of the application or any patent issuing thereon.

Address all communications to      VINCENT A. CICHOSZ  
DELPHI TECHNOLOGIES, INC.  
Legal Staff  
P.O. Box 5052  
Mail Code: 480-414-420  
Troy, Michigan 48007-5052

Telephone: (248) 267-5555

Inventor's signature

Full name :

Residence :

Post office address:

Galen B. Fisher  
GALEN BRUCE FISHER  
BLOOMFIELD HILLS, MI  
6999 CASTLE DRIVE  
BLOOMFIELD HILLS, MI 48301-2916

Date 6/16/2000  
Citizenship: US

Inventor's signature

Full name :

Residence :

Post office address:

John E. Kirwan  
JOHN E. KIRWAN  
TROY, MI  
2176 LANCER DRIVE  
TROY, MI 48084

Date 6/16/2000  
Citizenship: US

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

Docket No.: DP-301794

Inventors: GALEN BRUCE FISHER  
JOHN E. KIRWAN

Title: FAST LIGHT-OFF CATALYTIC REFORMER

**POWER OF ATTORNEY AND  
DESIGNATION OF CORRESPONDENCE ADDRESS**

As an officer of Delphi Technologies, Inc., the assignee of this patent application, I hereby appoint the following attorney employed by Delphi to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

VINCENT A. CICHOSZ (Reg. No. 35844)

Address all communications to:

VINCENT A. CICHOSZ  
DELPHI TECHNOLOGIES, INC.  
Legal Staff  
P.O. Box 5052  
Mail Code: 480-414-420  
Troy, Michigan 48007-5052  
Telephone : (248) 267-5555

I am authorized to make the above appointment. The assignee's ownership of this patent application is established by the attached assignment documentation, the attached documentation is a true copy of the original documentation, and the original or a true copy of the attached documentation has been or is concurrently being submitted to the Patent and Trademark Office for recording.

By: 

Name: Charles K. Veenstra  
Vice President

Date :

26 Jun 2000